

Installation guidelines

LEAFIELD litter bins

Viscount




Cleaning Products should be flushed with clean water and then washed with a mild detergent solution using a bristle brush or sponge. Care should be taken not to apply undue pressure that may damage labels. Flush clean with water after washing.



Manufacturing Standard (as applicable)
All Leaffield Environmental products are manufactured to BS EN ISO 9002.
Plastic materials: Mechanical properties tested to BS 2782 Hot dipped galvanized: BS 729
Powder coating: BS 3900 Zinc coating: BS 1706



Tools Chalk, hammer drill, 12mm masonry drill bit, mallet, 17mm socket,
Key:



PPE Always wear appropriate PPE equipment and follow safety guidelines

Preparation



Position the ballast cartridge so that the locking pin is at 45° in a clockwise direction from the direction that the lock on the bin will face




Using chalk, mark the position through the three holes onto the ground below



Remove ballast cartridge and clearly mark the ground in the three hole positions with a cross

Ground fixing kit and ballasting additional components: Available as optional extra.
Gravel for ballasting should be supplied by the contractor

Ground fixing bolt




X3

Washer



X3

Ballast bung



X1

(fitted to ballast cartridge)

Ground fixing to asphalt is not recommended



Removing and replacing liner



Grip liner using the two handles



Lift liner upwards clearing the bin body and empty




Using handles to grip, replace liner


Replacing hood and locking



Replace bin top locating the bayonet and lock

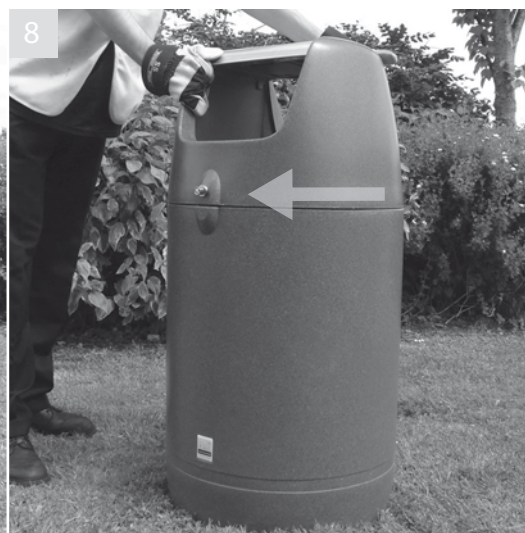

Twist top clockwise to align top with body

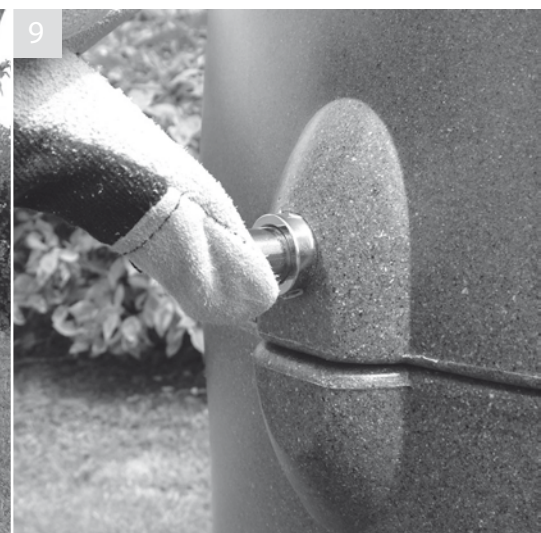

Push lock in to engage

Additional variations: Sack retention & ashtray



Stretch sack over bin body keeping liner edge above lip and taught. To remove liner pull the liner from the bin edge, gather and remove



To empty ashtray pull flap down releasing magnet - the contents will drop into the liner below



To close, push flap up engaging magnet



post
Leaffield Way, Leaffield Industrial Estate
Corsham, Wiltshire SN13 9UD



telephone
+ 44 (0)1225 816500



facsimile
+ 44 (0)1225 816501



website/email
www.leaffield-environmental.com
envinfo@leaffield.com



Installation guidelines

LEAFIELD litter bins

Vicount Flip top & Open top



Cleaning Products should be flushed with clean water and then washed with a mild detergent solution using a bristle brush or sponge. Care should be taken not to apply undue pressure that may damage labels. Flush clean with water after washing.



Manufacturing Standard (as applicable)

All Leaffield Environmental products are manufactured to BS EN ISO 9002.

Plastic materials: Mechanical properties tested to BS 2782

Hot dipped galvanized: BS 729

Powder coating: BS 3900 Zinc coating: BS 1706



Tools Chalk, hammer drill, 12mm masonry drill bit, mallet, 17mm socket,
Key:




PPE Always wear appropriate PPE equipment and follow safety guide lines


Preparation



Position the ballast cartridge so that the locking pin is at 45° in a clockwise direction from the direction that the lock on the bin will face

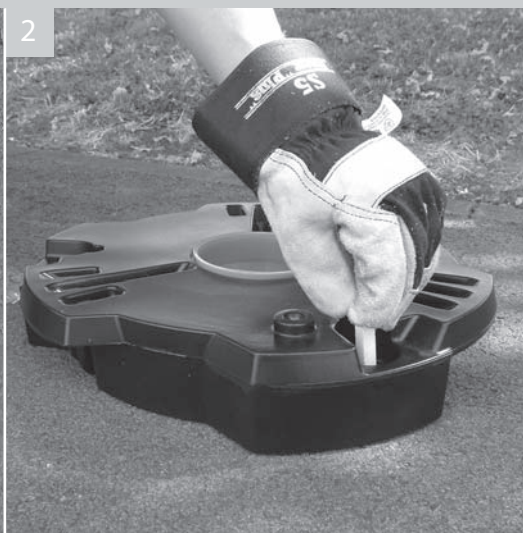

Using chalk mark the position through the three holes onto the ground below

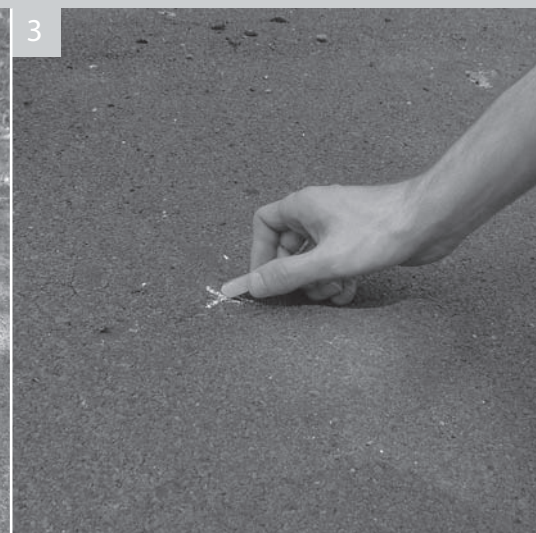

Remove ballast cartridge and clearly mark the ground in the three hole positions with a cross

Ground fixing kit and ballasting additional components: Available as optional extra. Gravel for ballasting should be supplied by the contractor

Ground fixing bolt




X3

Washer



X3

Ballast bung



(fitted to ballast cartridge)

X1

Ground fixing to asphalt is not recommended



Drilling holes and inserting bolts



Drill 12mm holes in the three marked positions to a depth of 100mm to accommodate the bolt length, remove debris from holes



Re-position the cartridge over the drilled holes. Add washers to bolts and push through holes in cartridge locating into drilled ground holes




Using a mallet drive bolts home

Tightening bolts




Use socket to tighten bolts, tighten to 22.0Nm torque for concrete. Tightening the bolts will fan out the bolt sheath holding the bolt secure

Locking ballast cartridge to bin

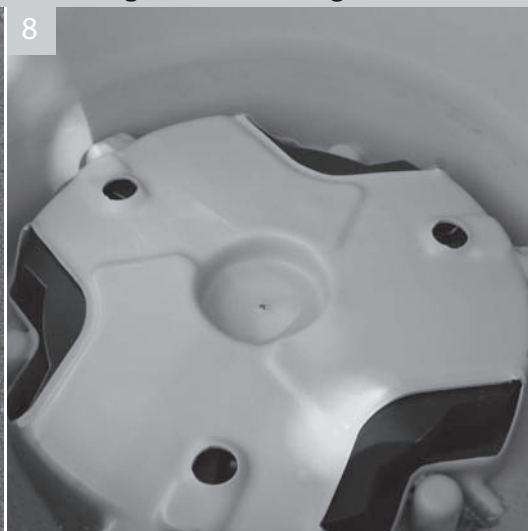

Place bin body over ballast cartridge. Locate so that the gaps in the cartridge align with gaps in the bin body, drop bin body to ground level

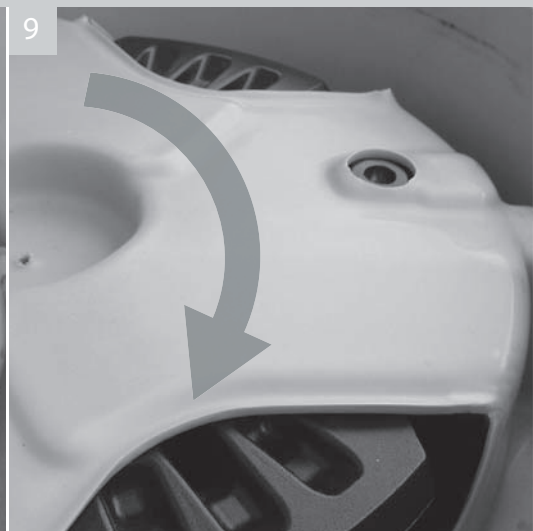

Twist bin body clockwise to lock. Locking pin will move beneath bin body until it reaches the locating hole where it will pop up and lock

Removing ballast cartridge




Using a stiff rod, depress locking pin on ballast cartridge, whilst pushing down twist bin body anti-clockwise, rotate until bin is free

Filling ballast cartridge



Remove cap and Pour gravel into the cartridge equally disperse gavel across the ballast cartridge fill to 30mm from top, replace cap

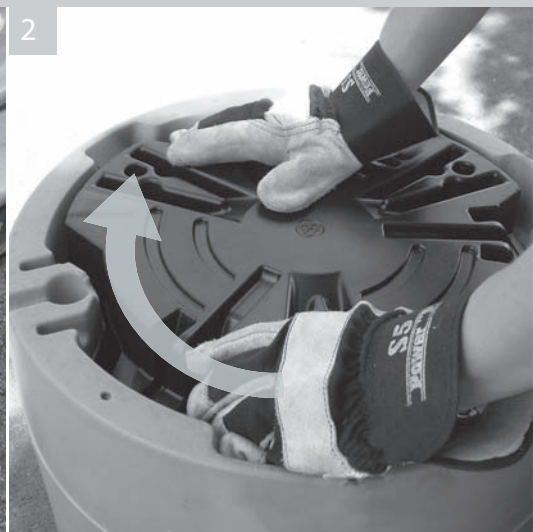

Turn bin body over insert ballast cartridge into recess and twist clockwise to lock locking mechanism is described in steps 8 and 9



post
Leafield Way, Leafield Industrial Estate
Corsham, Wiltshire SN13 9UD



telephone
+ 44 (0)1225 816500



facsimile
+ 44 (0)1225 816501



website/email
www.leafield-environmental.com
envinfo@leafield-environmental.com

