


User guidelines

LEAFIELD litter bins

Viscount



Cleaning Products should be flushed with clean water and then washed with a mild detergent solution using a bristle brush or sponge. Care should be taken not to apply undue pressure that may damage labels. Flush clean with water after washing.



Manufacturing Standard (as applicable)

All Leaffield Environmental products are manufactured to BS EN ISO 9002.


Plastic materials: Mechanical properties tested to BS 2782

Hot dipped galvanized: BS 729

Powder coating: BS 3900 Zinc coating: BS 1706



Tools Key:




PPE Always wear appropriate PPE equipment and follow safety guidelines

Unlocking and removing hood



1 Insert key and turn clockwise until stop. Lock will pop out and release

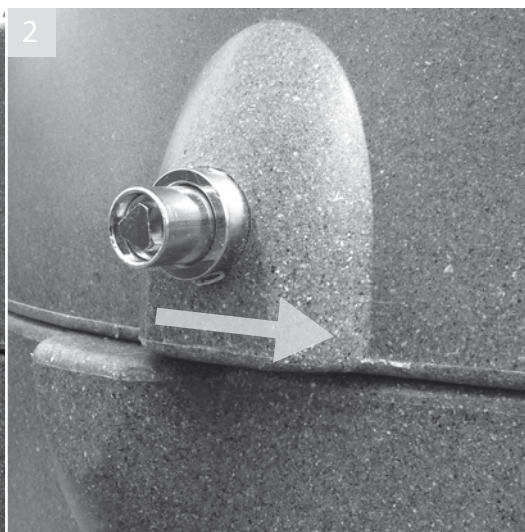

2 Twist bin top anticlockwise until it stops



3 Lift top upwards and off bin body

Viscount litter bins can be supplied with either a plastic liner or as sack retention

NOTE:

Leaffield does not operate a refuse collection system. This must be arranged by the customer.


Drilling holes and inserting bolts



Drill 12mm holes in the three marked positions to a depth of 100mm to accommodate the bolt length, remove debris from holes



Re-position the cartridge over the drilled holes. Add washers to bolts and push through holes in cartridge locating into drilled ground holes

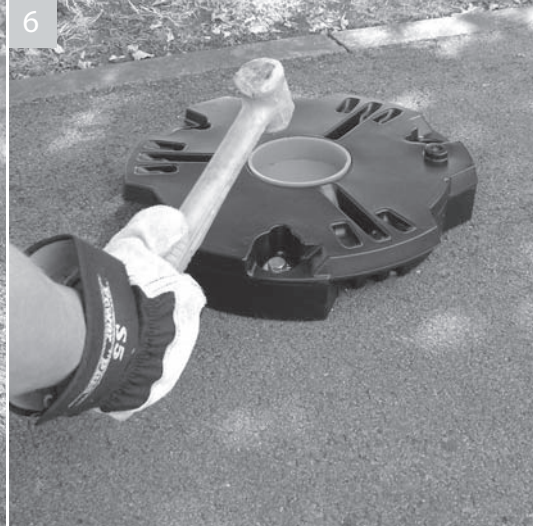


Using a mallet drive bolts home

Tightening bolts




Use socket to tighten bolts, tighten to 22.0Nm torque for concrete. Tightening the bolts will fan out the bolt sheath holding the bolt secure

Locking ballast cartridge to bin

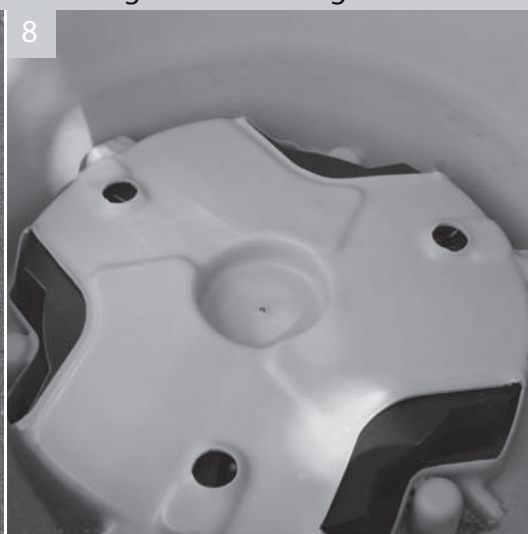

Place bin body over ballast cartridge. Locate so that the gaps in the cartridge align with gaps in the bin body, drop bin body to ground level

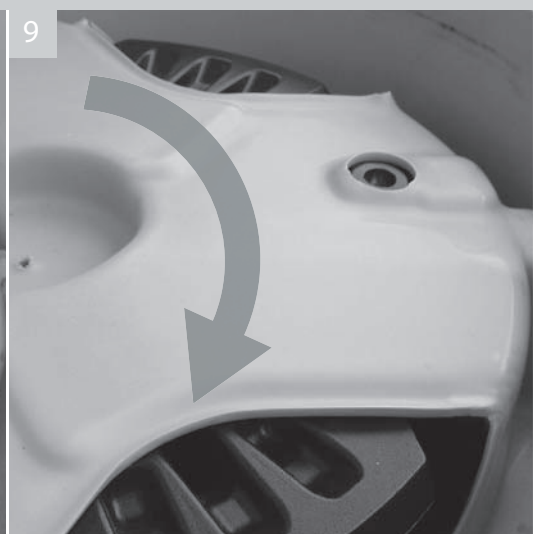

Twist bin body clockwise to lock. Locking pin will move beneath bin body until it reaches the locating hole where it will pop up and lock

Removing ballast cartridge




Using a stiff rod, depress locking pin on ballast cartridge, whilst pushing down twist bin body anti-clockwise, rotate until bin is free

Filling ballast cartridge



Remove cap and Pour gravel into the cartridge equally disperse gavel across the ballast cartridge fill to 30mm from top, replace cap

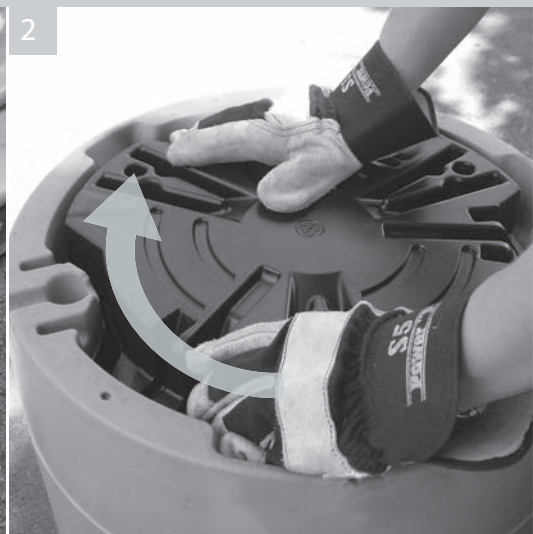

Turn bin body over insert ballast cartridge into recess and twist clockwise to lock locking mechanism is described in steps 8 and 9



post
Leafield Way, Leafield Industrial Estate
Corsham, Wiltshire SN13 9UD



telephone
+ 44 (0)1225 816500



facsimile
+ 44 (0)1225 816501



website/email
www.leafield-environmental.com
envinfo@leafield-environmental.com



User guidelines

LEAFIELD litter bins

Vicount Flip top & Open top



Cleaning Products should be flushed with clean water and then washed with a mild detergent solution using a bristle brush or sponge. Care should be taken not to apply undue pressure that may damage labels. Flush clean with water after washing.



Manufacturing Standard (as applicable)

All Leaffield Environmental products are manufactured to BS EN ISO 9002.


Plastic materials: Mechanical properties tested to BS 2782

Hot dipped galvanised: BS 729

Powder coating: BS 3900 Zinc coating: BS 1706




Tools Key:




PPE Always wear appropriate PPE equipment and follow safety guidelines

Unlocking and removing hood

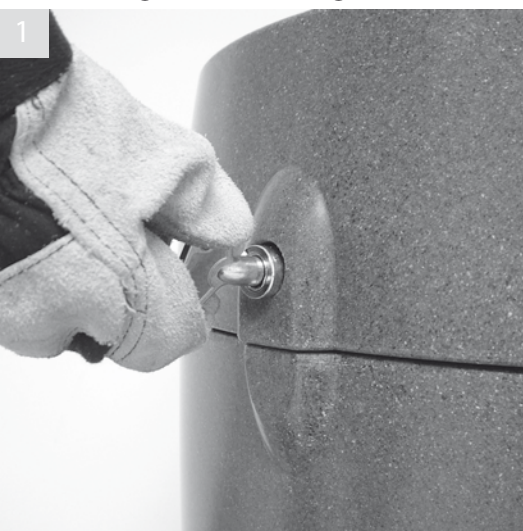

Insert key and turn clockwise until stop. Lock will pop out and release

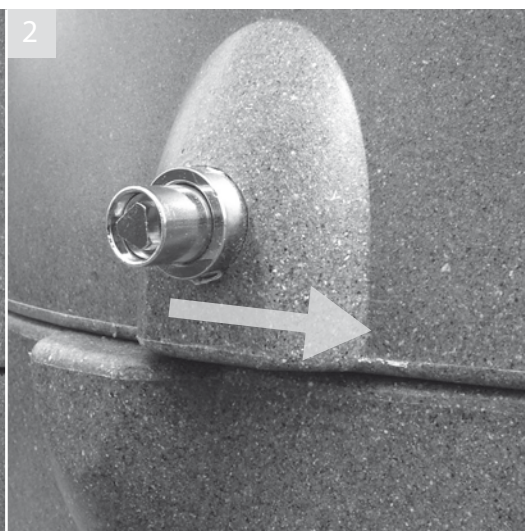

Twist bin hood anticlockwise until it stops



Lift top upwards and off bin body

Viscount litter bins can be supplied with either a plastic liner or as sack retention

NOTE:

Leaffield does not operate a refuse collection system. This must be arranged by the customer.

Removing and replacing metal liner

4



Grip liner using the two handles

5



Lift liner upwards clearing the bin body and empty

6



Using handles to grip replace liner

Sack retention

4



Drop the liner into the bin gripping the top edge

5



Stretch sack over bin body keeping liner edge above lip and taut

6



To remove: pull liner from bin edge gather and remove

Replacing hood and locking

7




Replace bin hood locating the bayonet and lock

8



Twist hood clockwise to align hood with body

9

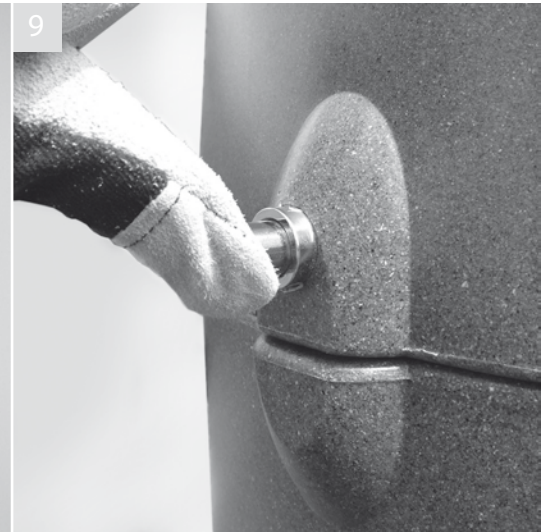

Push lock in to engage



post
Leafield Way, Leafield Industrial Estate
Corsham, Wiltshire SN13 9UD



telephone
+ 44 (0)1225 816500



facsimile
+ 44 (0)1225 816501



website/email
www.leafield-environmental.com
envinfo@leafield-environmental.com

