

BENITO -Urban



Delta Finalist
ADI Awards
2016



GERMAN
DESIGN
AWARD
WINNER
2018

Citizen

UM301 By Eugeni Quitllet © © BENITO



Variantes | Variantes | Alternatives



UM301S



UM301L

MARCAJE PERSONALIZADO*
MARQUAGES PERSONNALISÉS*
CUSTOMISED MARKING*

Otros productos | Autres produits | Other products




PA601V



PA601




PA601M

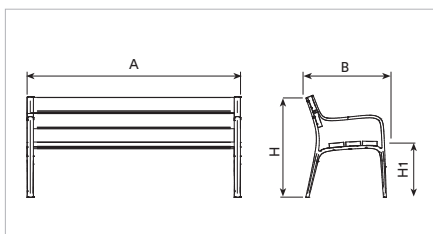

Ref.	A	B	H	H1
UM301	1750 mm	650 mm	818 mm	450 mm
UM301S	700 mm	650 mm	818 mm	450 mm
UM301L	2400 mm	650 mm	818 mm	450 mm

*OPCIONAL / EN OPTION / OPTIONAL / OPCIONAL

www.benito.com



Pies de fundición dúctil con tratamiento Ferrus, proceso protector del hierro, que garantiza una óptima resistencia a la corrosión. Acabado imprimación epoxi y pintura poliéster en polvo color Marson. Cinco tablonces de sección 120 x 35 mm de madera tropical tratada con Lignus, protector fungicida, insecticida e hidrófugo. Acabado color Marson. Tornillos de acero inoxidable. Anclaje recomendado: Tornillos de fijación al suelo de M10 según superficie y proyecto.

Piètement en fonte ductile avec traitement Ferrus, procédé qui protège le fer et garantit une résistance optimale à la corrosion. Finition couche primaire époxy et thermolaquage polyester teinte Marson. Cinq lattes de bois tropical de section 120 x 35 mm traité avec Lignus, protecteur fongicide insecticide et hydrofuge. Finition teinte Marson. Vis en acier inoxydable. Ancrage recommandé: vis M10 pour la fixation au sol, en fonction de la surface et du projet.

Ductile iron legs treated with Ferrus, a protective process that guarantees high corrosion resistance. Epoxy primer coating and Marson polyester powder coated finish. Five tropical wood boards measuring 120 x 35 mm, treated with Lignus, a fungicide, insecticide and waterproofing agent. Marson color finish. Stainless steel bolts. Recommended anchoring: M10 bolts to anchor to the ground, depending on the surface and the project.

